

<< Home

Call Us Today: (276) 638-2394

Company Information ▾ Windows ▾ Doors ▾ Room Enclosures ▾ Commercial Windows Aluminum Awnings Contact Us ▾



WINDOWS

Vinyl Double Hung

- Allweld III
- Dualvue II
- Nuweld II
- Westweld II
- The Westwood
- The West Elite

Vinyl Single Hung

- Sunvue II
- Westbilt II

Special Shapes

- Fixed/Picture Windows
- Shaped Window Grids
- Interior Mouldings

Casement/ Awning

- Westview Casement
- The Westwood

Vinyl Impact

- The Defender

Bow, Bay, Garden

Aluminum

- West Prime Thermal
- Westco

Storm Windows

- Original Deluxe
- Lancer & Yeoman
- Velv-A-Lume
- 33 Economy



Bay, Bow and Garden - Vinyl Windows

Bay and Bow Windows...



Bay Window



Bow Window

[Bay Window Projection Sizing Chart >>](#)

[Bow Window Projection Sizing Chart >>](#)

[Energy Conservation Incentives / Tax Credit >>](#)

[Contact A West Window Sales Representative >>](#)



Glass so smart, it can control the comfort of your home...


[LoE²-270 - Glass](#)

[LoE²-240 - Glass](#)

[LoE²-366 - Glass](#)

BAY WINDOW - TOP VIEW DIAGRAM

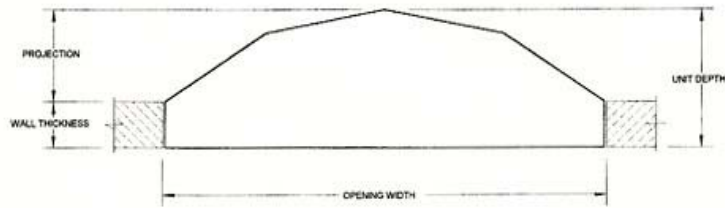


BOW WINDOW - TOP VIEW DIAGRAM**Things to consider when ordering Bays and Bows**

- For Bow windows, we can use several combinations of casement vents, double hung vents, or dead lite picture windows. All vent windows include aluminum screen cloth as standard. Fiberglass wire is available but there is no reduction in price.
- For Bay windows, the center panel must be fixed, but we can use casement, double hungs, or dead lite picture windows for the end panels. We discourage the sale of exceptionally narrow or exceptionally wide bays because the center panel can appear out of proportion with the rest of the unit. Bays will be manufactured as a standard 1/4 vent - 1/2 fixed - 1/4 vent based on opening dimensions. The angle will be within the range of 30 to 45 degrees.
- Bow and Bay windows must be properly supported by knee brackets, overhead support cables, existing structures, or by other appropriate means. The weight of the Bow or Bay window must be transferred to a structural member capable of supporting the weight. Failure to properly support Bow and Bay windows may void the product warranty.
- Minimum width of any operable casement section is 13" ; maximum is 36". Overall casement component size limitations are as they appear on the Westview Casement window price list.
- All wood in the head, seat, and jambs will be 1-1/4" veneer plywood which can be stained, varnished, waxed, or painted.
- Top (head), bottom (seat), and jambs are furnished with bows and bays. Roof is furnished by others.
- Use total unit area and not glass area only to compute optional glass add on pricing. Please see catalog section 22 for add on glazing options and pricing.
- All orders for bows and bays must be in writing. Telephone orders will be noted but must be confirmed in writing. Please supply information as follows:
 - Opening size (West Window will deduct 1/2" in width and height to allow fit in opening.)
 - Jamb or wall thickness (4" minimum)
 - Projection (Distance from outside wall surface to exterior front of bow or bay)
 - Unit depth (Wall thickness plus projection)
 - Number of lites (bows only)
 - Number and location of vents
 - Grid or no grid
 - Type of glass (See catalog section 22 for add on glazing options and pricing.)
 - Type of screen (Aluminum wire is standard. See catalog section 22 for screen options.)
 - Color (White or Tan)

- Knee brackets, overhead supports, or no supports (See preceding page for pricing)
- Other special items

Vinyl Garden Windows

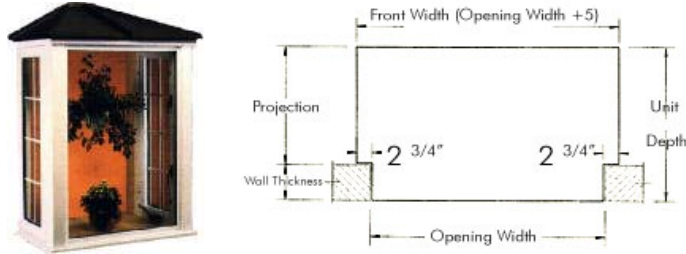

Things to consider when ordering Garden Windows

- Units will be manufactured with one welded vinyl operating casement on each side and one welded vinyl fixed window on the front with 1-1/4" veneer plywood for the top, bottom, and jambs. Casement operators are located toward the inside of the Garden Window. The roof is furnished by others.
- The outside width of the Garden Window will measure 5" greater than the window opening dimension.
- For operating casements, width is never to exceed height.
- Hinges will be concealed stainless steel.
- Garden Windows must be properly supported by knee brackets, existing structures, or by other appropriate means. The weight of the Garden Window must be transferred to a structural member capable of supporting the weight. Failure to properly support Garden Windows may void the product warranty.
- All orders must be in writing with information supplied as follows:
 - Opening Size (West Window will deduct 1/2" in width and height to allow fit in opening.)
 - Jamb or wall thickness
 - Projection (Distance from outside wall surface to exterior front of Garden Window - 18-1/2" to 31")
 - Unit Depth (Wall thickness plus projection with 48" maximum)
 - Grid or no grid
 - Type of Glass (See West Window Catalog section 22 for add on glazing options and pricing.)
 - Color (White or Tan)
 - Knee brackets or not
 - Other special items (Type of Screen, Argon Gas, or other special items)
- The standard Garden Window includes two (2) casement side vents and one (1) front fixed unit which are included in the price

[// TOP](#)



// West vinyl windows are independently tested for structural strength, air infiltration resistance, water management performance, and forced entry resistance. In addition to these rigorous AAMA tests, West Window voluntarily certifies its products with a third party agency, National Accreditation and Management Institute, to assure the consumer that the windows they purchase are constructed to the same high standards to which they were tested.

[Home](#) | [Company Information](#)
| [Our Showroom](#) | [Vinyl Windows](#) | [Vinyl Patio Doors](#) | [Room Enclosures](#) | [Contact](#)

P.O. Drawer 3071 Martinsville, VA
24115 | **Ph:** 276.638.2394 | **Toll Free:** 800.446.4167 | **FAX:** 276.638.2300

Copyright © 2010 West Window Corporation - All Rights Reserved